KLARIC
Individual Solutions for Measuring and Testing

KLARI-QUAD 1000V

four channel, high voltage isolated

- **configurable samplerate from 62,5 µs..1 s/sample**
- **online data output via isolated CAN, Analog**
- **Klaric probes usable (e.g. PT100, thermocouple, U- and I probes)**

PROBES

U probe	I probe	I-U probe	PT100 probe	thermocouple
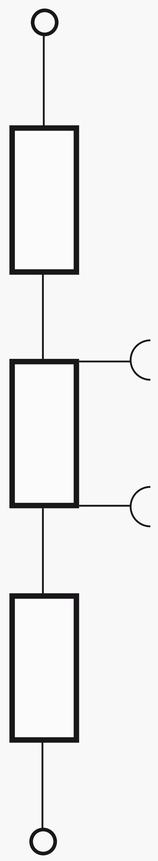	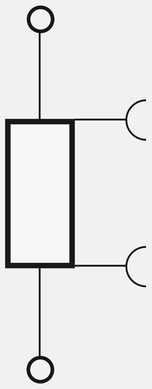	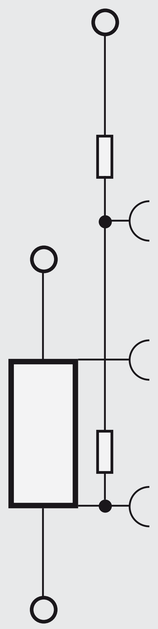	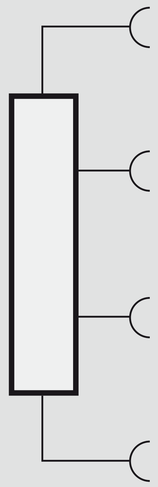	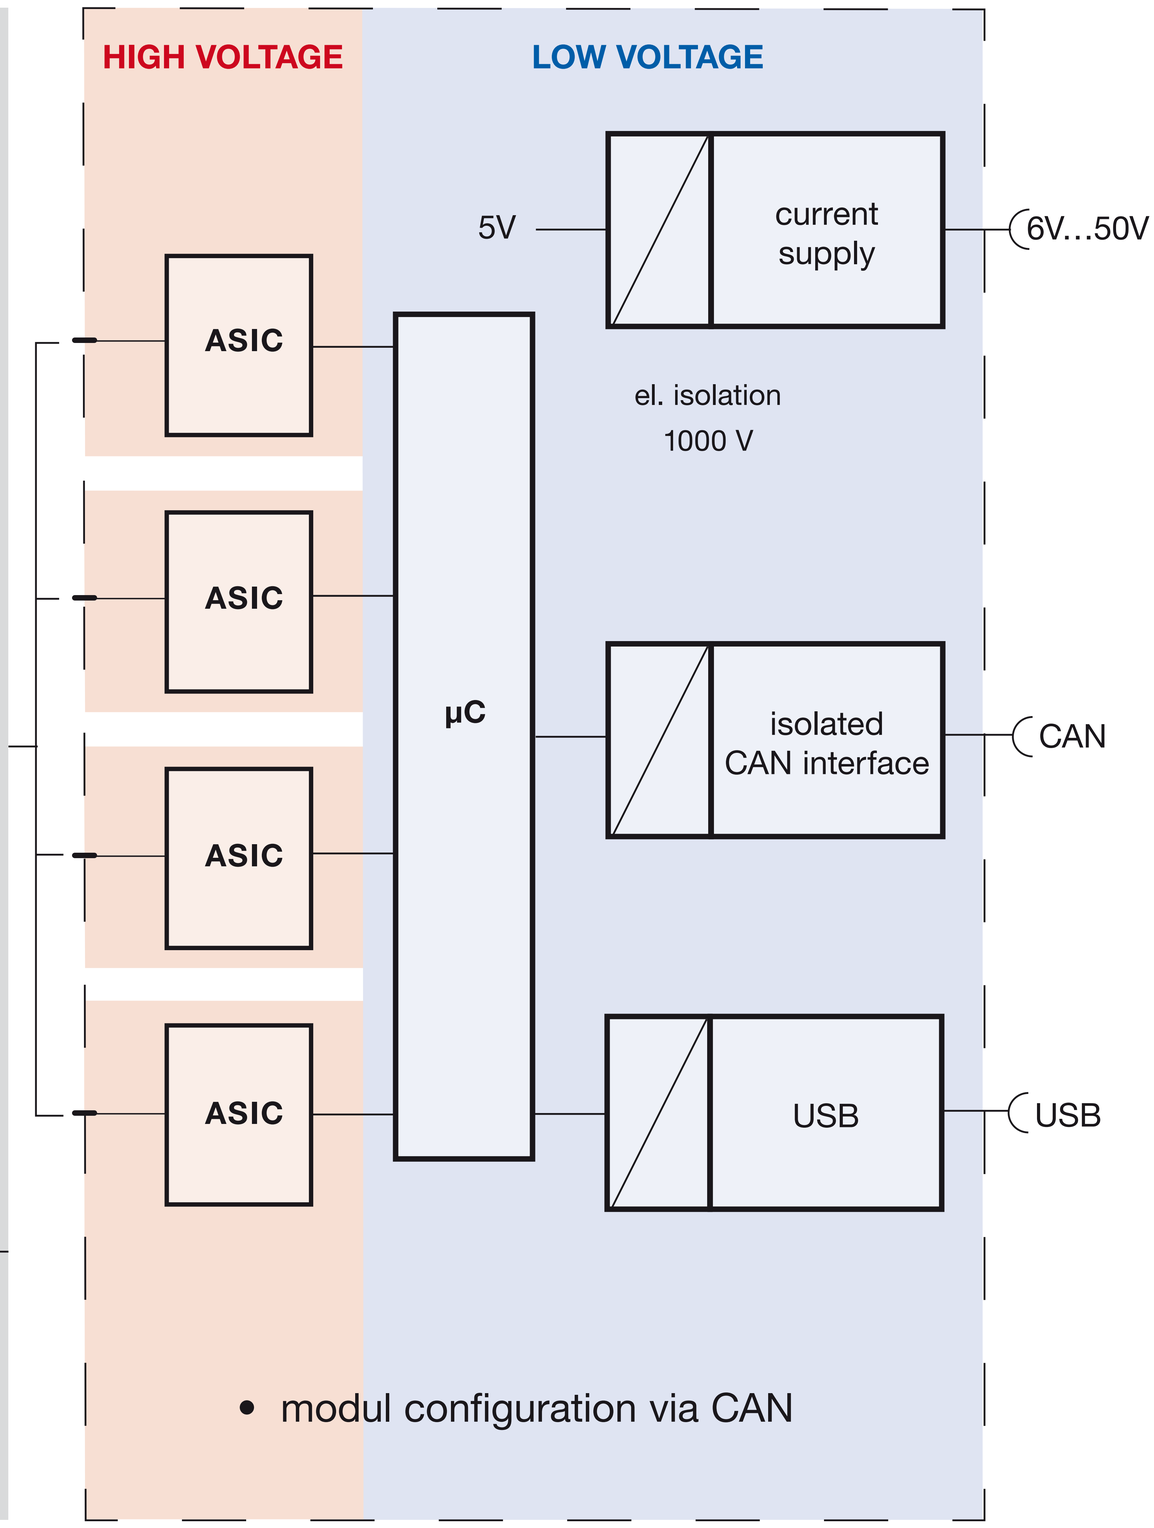
range/resolution	range/resolution	range/resolution	range	range
0…+/-200 V res. 170 µV 0…+/-1000 V res. 1,25 mV	0…-3 A res. 2,5 µA 0…-1500/+3600 A res. 1,25 mA	0…-1500/+3600 A res. 1,25 mA 0…+/-1000 V res. 1,25 mV	-50°C… +200°C	-100°C… +1000°C